


BLACK COMBI FLEX DUCTING

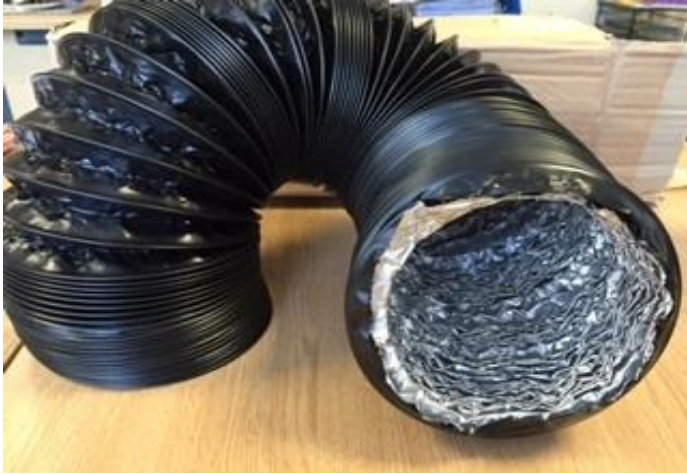

Combi-Flex is a new range of fully flexible reinforced, lightweight Aluminium Polyester and PVC laminated duct specially designed for the HVAC market. Suitable for low, medium and high pressure heating, ventilation and air conditioning supply or extract systems for use on both commercial and industrial applications.

A laminated construction encapsulating a high tensile steel wire helix ensures there is no separation from the duct material. The combi-flex is covered with a tough co-polymer outer duct/vapour barrier, which acts as a unique extra airtight, strong and durable barrier.

BLACK COMBI FLEX

ITEM #	SIZE mm (Diameter) x 6 METRE LENGTHS
17000/6	100
17001/6	125
17002/6	152
17003/6	203
17004/6	254
17005/6	305
17006/6	315
17007/6	355
17008/6	400

Technical Data:

Construction Material:	Laminated, Reinforced Aluminium/Polyester & PVC
Wirepitch:	102mm = 25mm, 125mm 508mm = 37mm
Temperature Range:	-30/+120 °C
Positive Working Pressure:	2500 Pa (Max)
Packing:	Individual box of 0.6 metres
External Colour:	Black
Diameter Range:	102mm to 508mm
Maximum Air Velocity:	30m/sec
Standard Length:	6 metre
Clamping:	Lightning Band, Stainless Steel Clamps or Quick Release Clamps

POLYAIRE UK

Units 3 & 4, Torridge Close,
Telford Way Business Park,
Kettering, Northants,
ENGLAND, NN16 8PY
Telephone: 01536 519922
sales@polyaire.co.uk